



## **SOS EMERGENCY PARACHUTE FLAT CIRCULAR AND 24 FEET CANOPY**



**The harness is  
equipped with  
aluminum hardware  
of easy and quick  
operation**

### **COMPONENTS:**

<b>Nº</b>	<b>DENOMINATION</b>
1	Canopy PARAFly T10-RE 24 ft.
2	Harness Container
3	Extractor Static Line




All the system is made with the highest quality materials, most of them under Military Standard Normative.

### **Main Features of the System:**

- a) Weight: 4,5 Kg.
- b) Dimensions packed for use: 470X310X150 mm. (0,022 m<sup>3</sup>)
- c) Maximum Weight Capacity: 360 lbs. (163 kg)
- d) Minimum Deployment Altitude: 50 meters
- e) Descent Rate: Avg. 22 ft./sec. (6.7 m/s)
- f) Maximum Jump Wind Speed: 15 mph (13 knots)
- g) Permissible operating time: 15 years

### **1.- CANOPY:**

- a) Shape: Flat Circular
- b) Diameter (nominal): 24 feet (7.3m)
- c) Number of suspension lines: 24
- d) Suspension line material: MIL-C-5040 type I
- e) Canopy Material: 1.1 oz. MIL-C-7020, type I ripstop fabric.
- f) Steerable: No

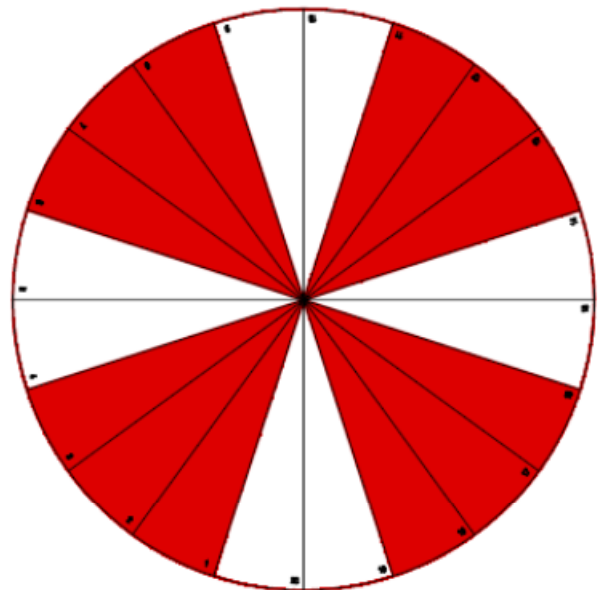




## 2. –HARNESS CONTAINER.

- a) Fabric of the container: 100% PES Cordura® 350 g/m<sup>2</sup>



- b) Harness main webbing: MIL-W-4088-T-VII

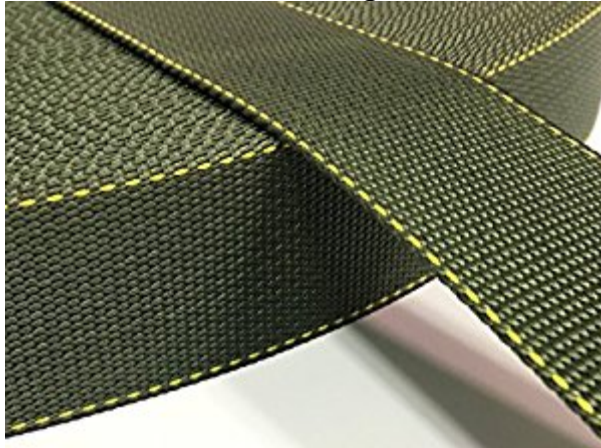

- c) 3 Quick release aeronautical aluminum COBRA® connectors.



- d) 2 “V” rings for additional cargo suspension.

PARAFly, S.A. as a supplier of the Ministry of Defence of Spain, NATO and several industries of the Military Sector, has the PECAL/AQAP 2110 and ISO 9001:2008 Quality Certification, for the development and manufacture of its products.